


Features & Benefits

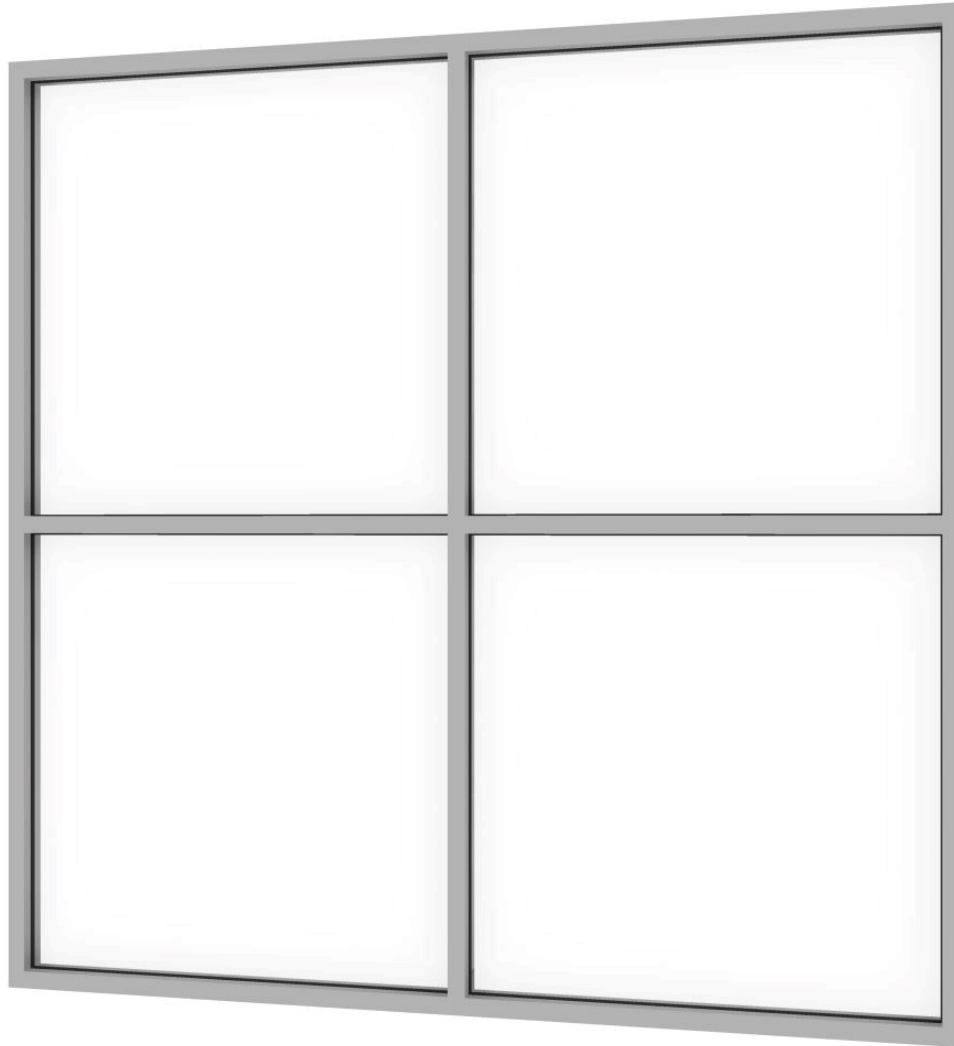

- 76 x 35mm Frame
 - Single Glazed (up to 10mm)
 - Internal & External glazing options
 - Exclusively designed components to improve the system's performance and function
 - NATA tested to Australian Standards (AS2047-1999)
 - Window Energy Rating Scheme (WERS) data available; www.wers.net
 - Serviceability Limit State (SLS)
Pressures up to 2200Pa*
 - Ultimate Limit State (ULS)
Pressures up to 3300Pa*
 - Water Performance up to 300Pa*
 - Compatible with:
 - 200 Series Door
 - 275 Series Door
 - 35 & 50 Window
 - 380 Sliding Window
- * Refer to Section 2 for specific details and limitations