


Features & Benefits

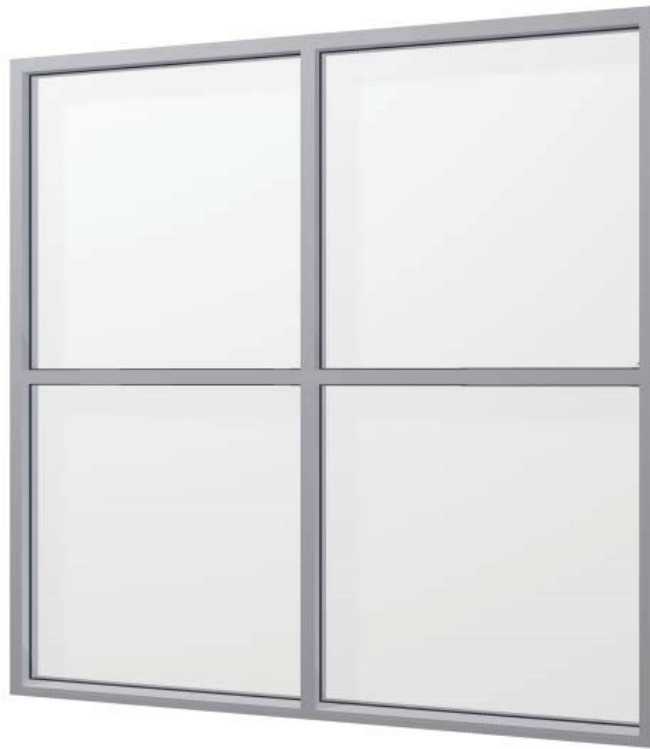

- 101.6mm x 44mm Frame
- Single Glazed Options (up to 10mm)
- Externally or internally center glazed frame
- Exclusively designed components to improve the system's performance and function
- NATA tested to Australian Standards (AS2047-1999)
- Max Tested Serviceability Limit State (SLS)
Pressures up to 5,200 Pa*
- Max Tested Ultimate Limit State (ULS)
Pressures up to 10,300 Pa*
- Max Tested Water Performance up to 1,500Pa*
- Window Energy Rating Scheme (WERS) data available; www.wers.net
- Acoustic Sound Insulation Rating (Rw (C;Ctr)) up to 37 (-1;-3)*
- Compatible with
 - 425 Double Glazed Narrowline
 - 200 & 275 Series Doors
 - 900 Sliding Door
 - Artisan Folding Doors
 - Genesis 400 Series
 - 35 & 50 Series Windows
 - 471 Double Hung Window
 - 480 Sliding Window
 - 950 Sliding Window
 - Euro Tilt & Turn Window
 - Euro Awning / Casement Window
 - 400 Louvre Adaptor

* Refer to Section 2 for specific details and limitations