


Features & Benefits

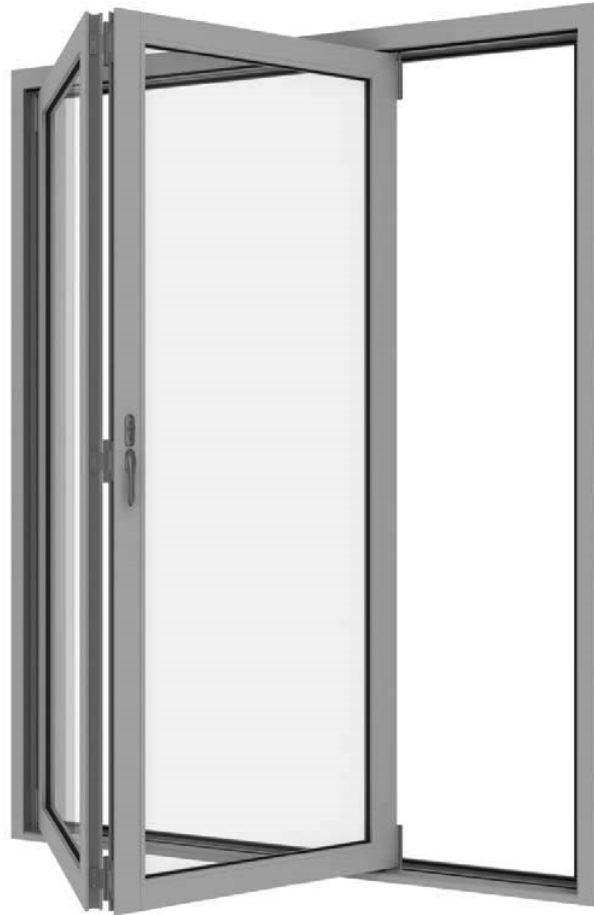

- 101.6mm frame with a range of sill & stile Options
 - Top Hung Track System
 - Open in, open out & corner entry configurations
 - Single Glazed 4 to 10mm
 - Thick Glass Glazed 12 to 20mm
 - Double Glazed up to 28mm
 - Easy to adjust hardware including AGS Smart Hinge™
 - AGS Smart Groove™ for superior fabrication
 - Exclusively designed components to improve the system's performance and function
 - NATA tested to Australian Standards (AS2047-1999)
 - Serviceability Limit State (SLS) Pressures up to 2200Pa*
Ultimate Limit State (ULS) Pressures up to 4200Pa*
Water Performance up to 1000Pa*
 - Window Energy Rating Scheme (WERS) data available; www.wers.net
 - Acoustic Sound Insulation Rating (Rw) up to 36*
- * Refer to Section 2 for specific details and limitations