


Features & Benefits

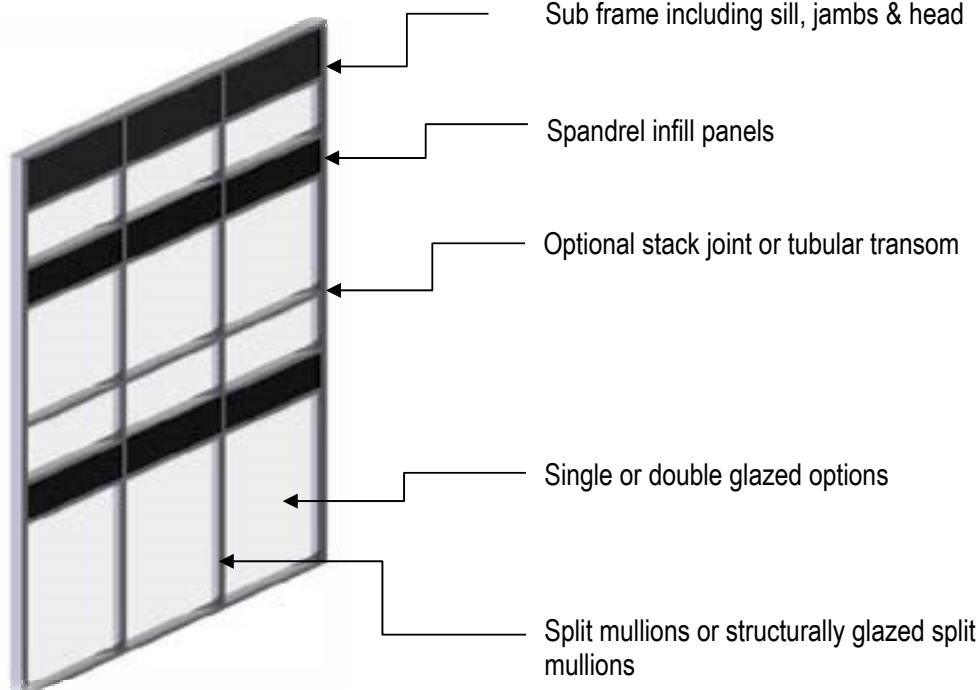

- Pressure equalised curtain wall. The principle relies on the internal system being equal to the external pressure which eliminates the tendency to draw in moisture into the system.
- 150mm x 75mm Frame
- Double Glazed Options as standard (Up to 28mm)
- Single Glazed Options as standard (Up to 12mm with inlay bead)
- Structurally Glazed Mullions
- Exclusively designed components to improve the performance and function of the system.
- Integrated lifting and hanging bracket with built in adjustment capabilities
- Integrated shade bracket available for pocketed mullions
- NATA tested to Australian Standards (AS/NZS4284-2008) Testing of building facades
 - Serviceability Limit State (SLS)
Pressures up to 3000Pa*
 - Water Performance up to 900Pa* (Static)
1800Pa (Cyclic)
 - Air infiltration
0.33 l/s.m² @ 75Pa Positive Test Pressure
0.31 l/s.m² @ 75Pa Negative Test Pressure
 - Ultimate Limit State (ULS)
Pressures up to 4500Pa*
- Movement capabilities
 - ± 10mm vertical when set at nominal location. (20mm overall) at stack joints.
 - ± 5mm horizontal when set at nominal location. (10mm overall) at split mullions.