


## Features & Benefits

---

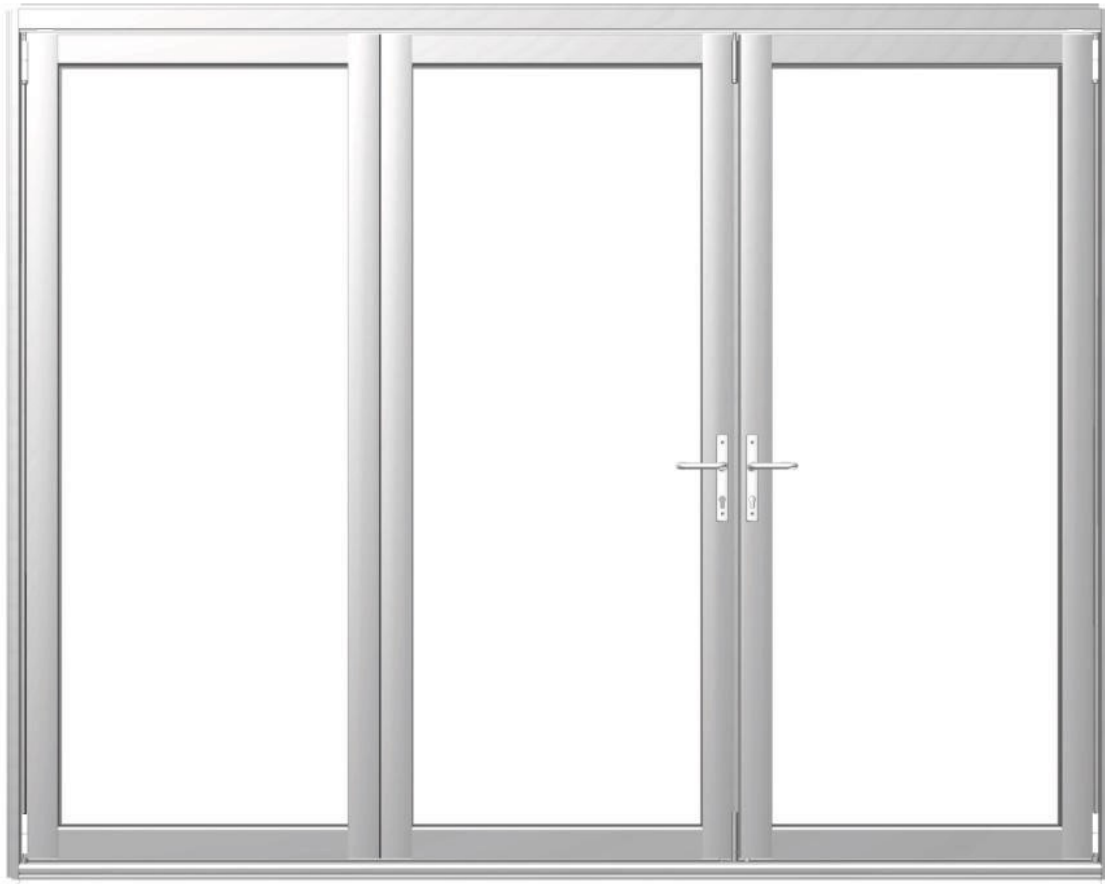

- 
- 80mm & 101.6mm (400 Series) Frame Options
  - Up to 8 Panel Door configurations
  - Single & Double Glazed Options (up to 22mm)
  - Stainless Steel Hardware
  - Exclusively designed components to improve the system's performance and function
  - The Smart Hinge® eliminates the need for pre-drilled holes and facilitates ease of positioning during installation
  - Height adjustable Door Panels
  - NATA tested to Australian Standards (AS2047-1999)
  - Serviceability Limit State (SLS)  
Pressures up to 1500Pa\*  
Ultimate Limit State (ULS)  
Pressures up to 1800Pa\*  
Water Performance up to 450Pa\*
  - Window Energy Rating Scheme (WERS) data available; [www.wers.net](http://www.wers.net)
  - Acoustic Sound Transmission Rating (STC) up to 32\*
- \* Refer to Section 2 for specific details and limitations